



AIR DRYING SYSTEM

Carbotrade adsorption dryer MDA 1500 combined to pre-mounted Carbotrade refrigerant dryer DE 375

FEATURES

Maximal inlet flow: 1680 Nm³/h at 9 bar


Maximal outlet flow: 1344 Nm³/h

Maximal inlet temperature: 45°C

Outlet temperature = inlet temperature + 7 in °C

• Minimal dew point temperature: -40°C

- Upstream mounted automatic drain micron filter G 1810 X and submicron filter G
 1810 Y and downstream mounted automatic drain pre-filter G 1810 X
- Inlet and outlet mechanical connection ports G 2" 1/2

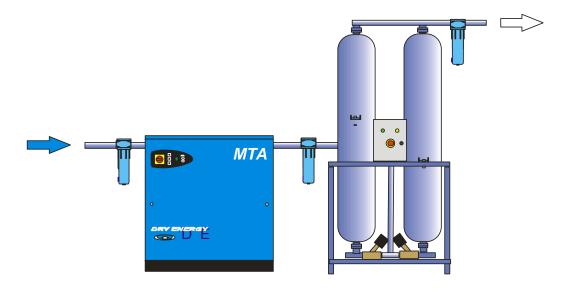

ois-gabon@ois-group.com

ois-congo@ois-group.com









ois-gabon@ois-group.com

ois-congo@ois-group.com

