




Diesel Tanks



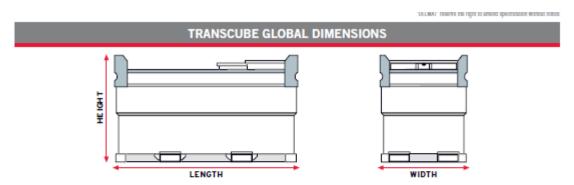

TRANSCUBE GLOBAL SPECIFICATIONS							
MODEL	CAPACITY		DIMENSIONS (mm)			WEIGHT (kg)	
•	LITRES	GALLONS	LENGTH	WIDTH	HEIGHT	UNLADEN	LADEN
10TCG	959	210	1150	1150	1320	514	1377
20TCG	2000	440	2300	1150	1320	865	2665
30TCG	3000	660	2300	1550	1320	992	3692

GABON <u>ois-gabon@ois-group.com</u>

CONGO ois-congo@ois-group.com

www.ois-group.com









THE TRANSCUBE 'GLOBAL'

110% bund capacity to ensure environmental compliance.



THE TRANSCUBE 'GLOBAL'

Internal baffles to prevent fuel surge during transit. Tie down points on all 4 corners to secure tank during transit.



THE TRANSCUBE 'GLOBAL'

Tank can be lifted full of fuel via the 4 lifting eyes.



THE TRANSCUBE 'GLOBAL'

Extra protection for tank and paintwork with the galvanised framework around the tank.



THE TRANSCUBE 'GLOBAL'

Generator feed & return hoses through letterbox means lid can be kept closed and locked, even during use, for extra security.



THE TRANSCUBE 'GLOBAL'

Forklift pockets are on all 4 sides for ease of manoeuvring.

GABON ois-gabon@ois-group.com CONGO ois-congo@ois-group.com

www.ois-group.com









GABON ois-gabon@ois-group.com

CONGO ois-congo@ois-group.com

www.ois-group.com

