

# SSS TEST GAUGES

### Case & Bezel

Aluminium safety pattern case, brass bezel, black stove enamelled as standard. Test gauges are also available in 150mm (6") dial DMC or stainless steel safety pattern cases. For dimensional details please refer to pages 4 and 7. For DigiGauge Digital Pressure Gauges with 0.2% full scale accuracy see page 22.

### Pressure Element

Bourdon tube: stainless steel

### Mountings

Direct, surface or panel mounting

### Connections

3/8" + 1/2" (NPT - BSP) other connections available on request.

### Maximum Range

Vacuum through 1000 Bar - higher ranges available on request. Please refer to standard pressure ranges page 25.

### Window

Safety glass as standard or perspex if required

### Dial

Aluminium - white with black scale markings - mirror dial for anti-parallax readings.

### Pointer

Aluminium knife edge black finish

### Movement

Stainless steel




### Accuracy

The error in pressure indication on either increasing or decreasing pressure at any point on the scale is not greater than 0.25% of the maximum scale value.

### Certification

A full certificate of calibration is issued with all test gauges as standard.

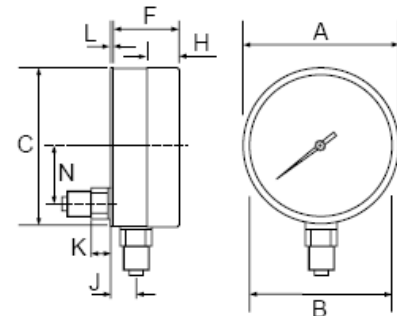

501T Vertical Entry, Direct Mounted

All dimensions are in mm. Drawings are for illustration purposes only.

Nominal Size	A	B	C	D	E	F	G	H	I	J	K	L
150mm (6")	159	146	162	181	187	56	57	37	30	19	22	5



**Contacts:**

**Port Gentil:**

[juan.Guerrero@ois-group.com](mailto:juan.Guerrero@ois-group.com)

[olivier.vacher@ois-group.com](mailto:olivier.vacher@ois-group.com)

[bert.bouchard@ois-group.com](mailto:bert.bouchard@ois-group.com)

**Pointe Noire:**

[jean-pierre.lafont@ois-group.com](mailto:jean-pierre.lafont@ois-group.com)

[ignacio-guerrero@ois-group.com](mailto:ignacio-guerrero@ois-group.com)

[www.ois-group.com](http://www.ois-group.com)