


## AIR DRIVEN TEST & CHEMICAL INJECTION POWERPACKS

### SELF CONTAINED PORTABLE POWER PACK

Simple to operate:-

- 1/ Connect air supply.
- 2/ Connect liquid supply if no reservoir.
- 3/ Connect to test specimen.
- 4/ Perform Pressure Test.
- 5/ Release pressure.

End of Test.

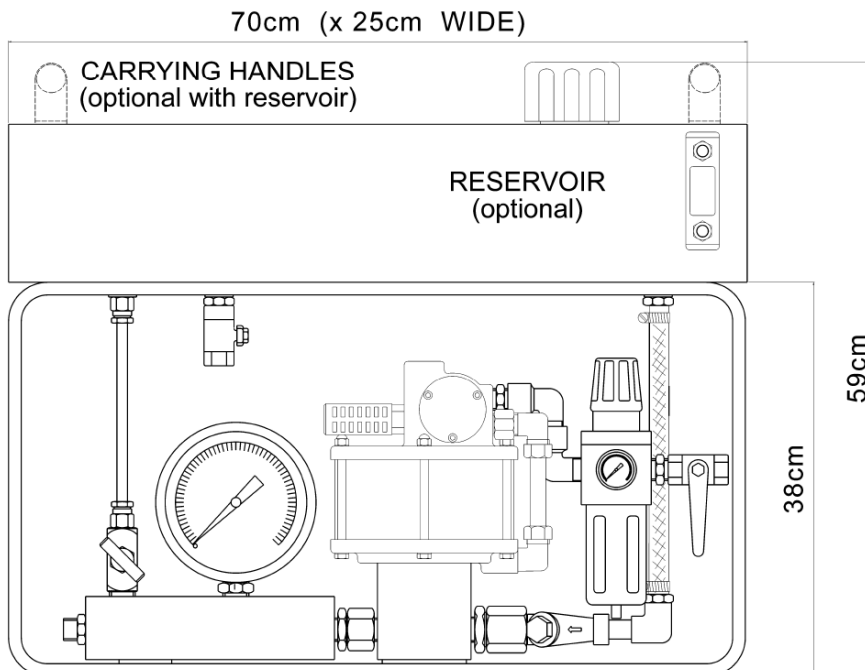

**AVAILABLE RATIOS :**

- 17.6 : 1      11 LPM MAX OUTPUT PRESSURE 115 BAR
- 53 : 1        3.8 LPM MAX OUTPUT PRESSURE 350 BAR
- 256 : 1      0.84 LPM MAX OUTPUT PRESSURE 1700 BAR

- Suitable for hazardous environments.
- Powered by any fixed or portable compressed air source to 8 bar.
- Infinitely variable capacity and discharge pressure by simple regulation of air supply.

Trojan Type - 'M' RATIO 1:	4.4	9.9	13.8	17.6	28	38	53	79	114	159	256	400
OUTPUT/CYCLE CC	195	86	62	48	30	22	16	10	7	5	3	2
MAXIMUM FREE FLOW litres/minute	37	23	15	11	7.3	5.8	3.8	2.8	1.8	1.5	0.84	0.58
MAX. OUTPUT PRESSURE (BAR) (With an air supply of 7 bar)	29	65	90	115	185	250	350	525	755	1055	1700	2660



**Port Gentil:**

[juan.Guerrero@ois-group.com](mailto:juan.Guerrero@ois-group.com)  
[olivier.vacher@ois-group.com](mailto:olivier.vacher@ois-group.com)  
[bert.bouchard@ois-group.com](mailto:bert.bouchard@ois-group.com)

**Pointe Noire:**

[jean-pierre.lafont@ois-group.com](mailto:jean-pierre.lafont@ois-group.com)  
[ignacio-guerrero@ois-group.com](mailto:ignacio-guerrero@ois-group.com)

[www.ois-group.com](http://www.ois-group.com)